



## Corrugated Aluminium - Flat

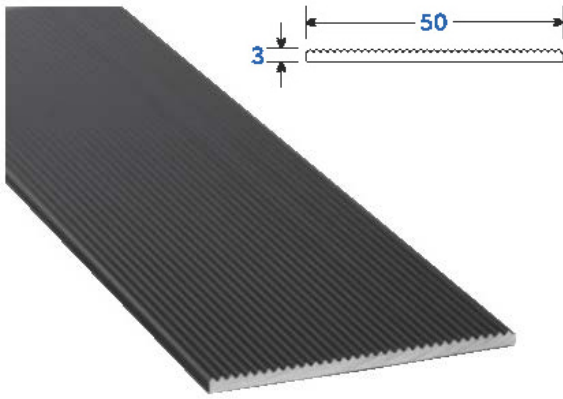

Specifications	
<b>SKU</b>	STFLAT50B (no holes drilled) STFLAT50B-HOLES (with holes drilled)
<b>Material</b>	Anodised aluminium
<b>Colour</b>	Black
<b>Dimensions:</b>	<b>Width:</b> 50mm <b>Thickness:</b> 3mm <b>Length:</b> Custom Length
<b>Slip Rating</b>	P5
<b>LRV Rating</b>	Dry 1.90 Wet 1.41
<b>Compliance:</b>	AS/NZS 1428.1-2009.

## Corrugated Aluminium Stair Tread 50 x 10

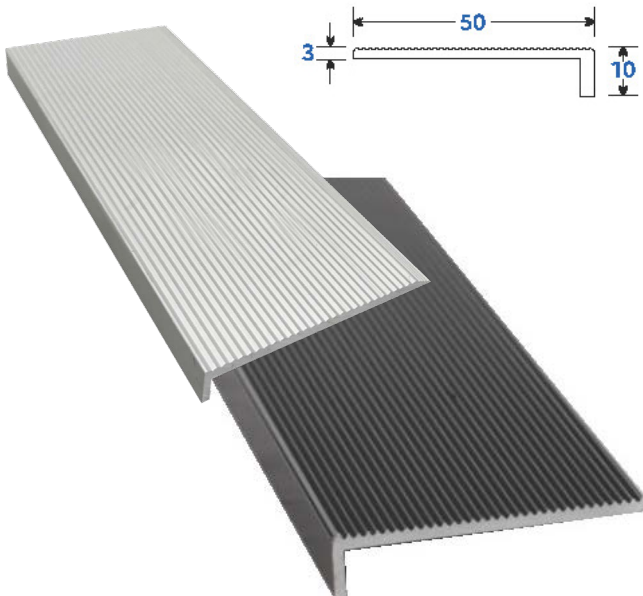

Specifications	
<b>SKU</b>	STC10B (no holes drilled - Black) STC10B-HOLES (with holes drilled - Black)  STC10N (no holes drilled - Clear) STC10N-HOLES (with holes drilled - Clear)
<b>Material</b>	Anodised aluminium
<b>Colour</b>	Black OR Clear
<b>Dimensions:</b>	<b>Width:</b> 50mm <b>Lip:</b> 10mm <b>Thickness:</b> 3mm <b>Length:</b> Custom Length
<b>Slip Rating</b>	P5
<b>LRV Rating</b>	Dry 1.90 Wet 1.41 (Black) Dry 49.04 Wet 48.95 (Clear)
<b>Compliance:</b>	AS/NZS 1428.1-2009.

### Installation:

**Option 1:** We drill countersunk holes for you and supply screws:

If you pick the option of us drilling holes for you, we will also supply you screws.

**Option 2:** No holes drilled no fixings supplied

We suggest using Selleys Hold Up adhesive to fix stair nosings to stairs if you decide to go with this option.

