
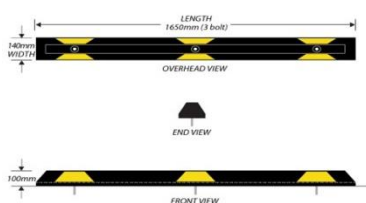



Product Information & Installation Guide

Rubber Compliant Wheel Stops (Concrete Surfaces)

		Australian Compliant - Complies with AS2890.1:2004.	
		Specifications	
		SKU: WSTOPCF	
		Description: Rubber Wheel Stop	
		Material: Rubber	
		Finish: Yellow Reflective Panels	
Height: 100mm			
Length: 1650mm			
Weight: 16kg			


	SKU: WSTOPDBLCC
	Available with BLUE reflective epoxy panels for use in Disabled Bays

	1 Year Warranty
--	-----------------

Installation Guide



You will need:

- A hammer drill with a 14mm masonry drill bit
- The M10 screw fixings supplied with the wheel stops.
- A 17mm socket
- A hammer
- A hand broom or industrial vacuum (optional)

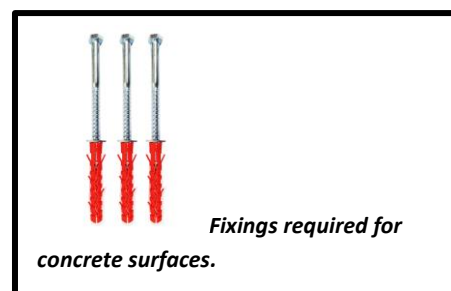

What to do:

1. Read all the instructions from beginning to end first.
2. Determine exactly where the wheel stop will be placed. See our handy chart below for the Australian Standards (AS2890.1:2004)

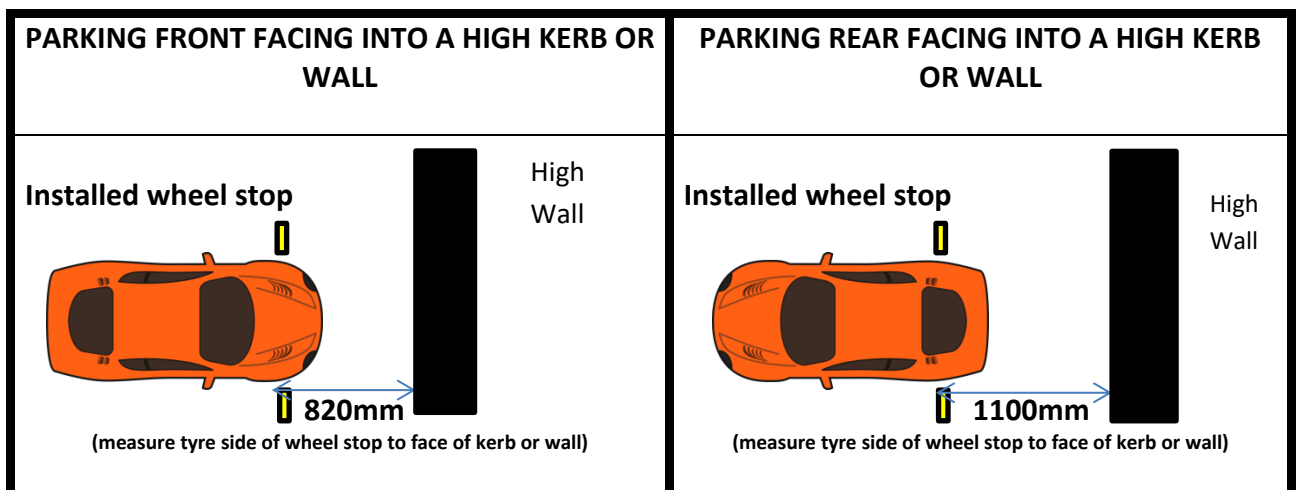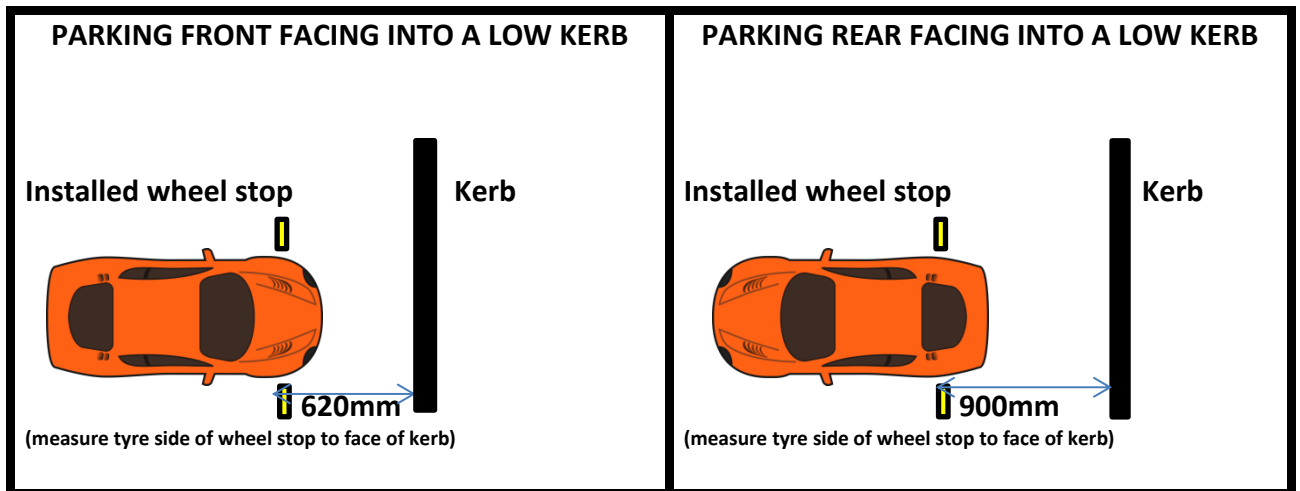

3. Put the wheel stop where it will go and using your hammer drill, drill a guide hole in the concrete through each hole in the wheel stop using the 14mm masonry drill bit. (This is to mark the surface so that you know where to continue to drill).
4. Remove the wheel stop and brush or vacuum away the concrete dust.
5. Continue to drill each guide hole to an approximate depth of 120mm.
6. Brush or vacuum away the concrete dust.
7. Put the plastic plug component of the fixing in the drilled hole and hammer in.
8. Place the wheel stop over the holes, line up and place the supplied M10 screw through the wheel stop and into the plastic plug.
9. Use your 17mm socket to tighten the M10 screw.

For a seamless installation, ensure your wheel stops are placed on a flat surface.

Safety Xpress recommends you put the safety of yourself and others first when installing your wheel stops. Please be mindful of using and wearing the correct safety gear.