


# MIT-SP Mortar for use in masonry

HOBSON Part prefix: MUCMTSP &lt;&lt;

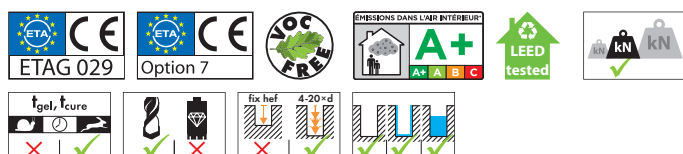


## Applications

light steel constructions, frames, gates, light duty applications, façades, consoles

## Temperatures

	-5÷+1°C	0÷+4°C	5÷+9°C	10÷+14°C	15÷+19°C	20÷+29°C	30÷+34°C	35÷+39°C
Working time, in minutes ( $t_{gel}$ )	90	45	25	20	15	6	4	2
Curing time, in minutes ( $t_{cure}$ )	360	180	120	100	80	45	25	20

## Installation



## Features

- European Technical Approval according to ETAG 029 for use in masonry
- European Technical Approval Option 7 for non-cracked concrete with anchor rod and with rebar used as anchor
- VOC free according to Swiss legislation and certified A+ according to DEVL 1101903D / DEVL 1104875A
- LEED - Test Report
- Suitable for assemblies in perforated brick with sleeve
- Medium duty fastening
- Fast curing
- Variable setting depth in concrete
- Dry, damp and water-filled drill holes
- Styrene free and low odour
- Colour of mortar: grey
- Indoor (zinc plated) and outdoor (stainless steel) applications



1808031FL

ONLINE

FREE Design software download: [hobson.com.au/mungo-software](http://hobson.com.au/mungo-software)

**QUALITY FASTENERS SINCE 1935**  
Full range of quality fasteners: [www.hobson.com.au](http://www.hobson.com.au)