


Peel & Stick Tactile

The Safety Xpress Peel and Stick Tactile reduces the installation time of an otherwise extremely time consuming process.

The design of the top of the dome prevents water pooling, a problem with many other products and a potential slipping hazard.

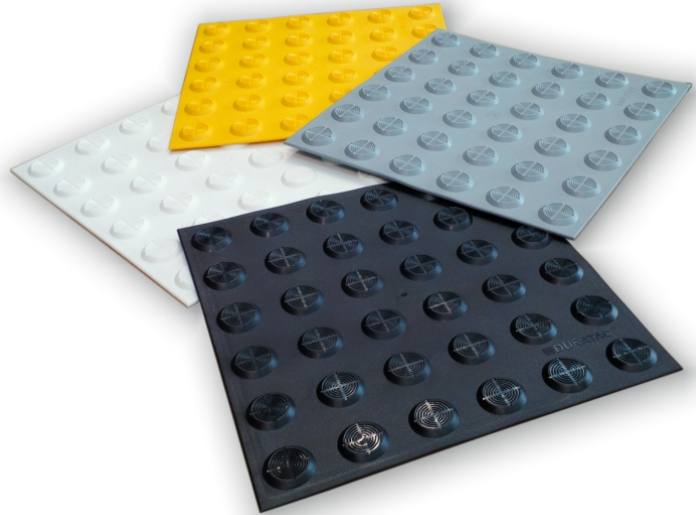

Eight standard colours (Grey/Black/Yellow/White/Silver/Red/Blue and Beige) are available in this Tactile series to achieve required luminance contrast on diverse substrates.

SLIP RATING: P4 (High)	Suitable Substrates	Dimensions	
<p>LUMINANCE CONTRAST: Tactile Indicators require a 30% luminance contrast with that of its surrounding substrate to achieve compliance with AS14528.1 Design for Access & Mobility.</p> <p>WARRANTY: 10 Year Warranty (certificate supplied with purchase)</p>	<p>Natural Stone (Granite, Marble Sandstone, Slate, Blue Stone, Basalt & more)</p> <p>Asphalt</p> <p>Concrete</p> <p>Timber/Rubber Vinyl Flooring</p> <p>Ceramic</p>	<p>Top of Dome 25mm Base of Dome 35mm Height of Dome 4mm</p>	<p>Size of Pad 300 x 300mm</p>
		<p>Manufactured to AS/NZS 1428.4.1:2009</p>	

Installation Tips:

1. Refer to AS/NZS 1428.4 for TGSI positioning.
2. Wipe surface down with acetone. Make sure surface is dry & free of dirt & grit.