


Technical Information Sheet

Ceramic Range

Ceramic range is the most economical TGSI product range currently available. The durable porcelain tile is resilient and has extreme UV stability. The range has four different colours which all comply with the Luminance Contrast Standards as set out in AS/NZ 1428.4.1:2009.

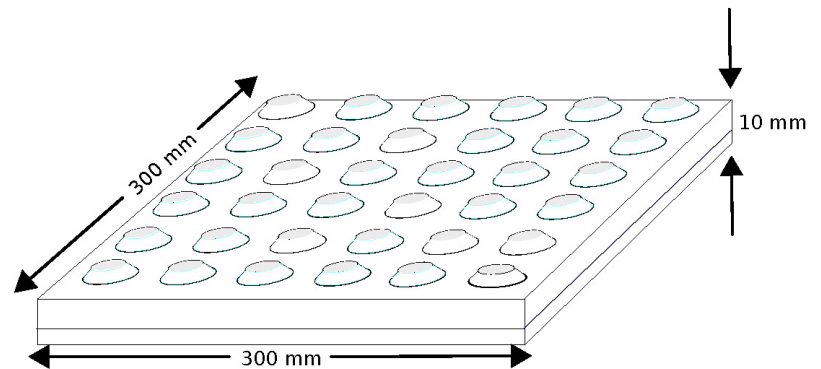

Ceramic TGSI

Testing (Performed by CSIRO)

AS/NZA 4586 Appendix A Wet Pendulum 4S	W
AS/NZS 4586 Appendix D Oil Wet Ramp Test	R12
AS/NZS 1428.4 Wet & Dry Luminance Reflectance Dry 44.09/Wet 42.3 Mean Contrast Range 29.6-57.3	
AS 4459.4 Breaking Load	2242N
Breaking Strength	2092N
Modulus of Rupture	31.39 N/mm²
ISO 10545-3 Water Absorption	0.19%

Colour Selection

Ivory
Charcoal
Grey
Yellow

Dimensions:

Top of Dome	25mm
Bottom of Dome	35mm
Height of Dome	5mm

Tile Dimensions:
300x300mm

Tile Thickness:
10mm

**Manufactured to AS/NZS
1428.4.1:2009**

Installation Tips:

1. Lay Ceramic Tactile as you would normal tile units.
2. Tile thickness is 10mm. It is ideal to leave 13-15mm rebate in freshly laid concrete to accommodate glue and cement, and a 2-3mm gap for grouting around the tiles.